

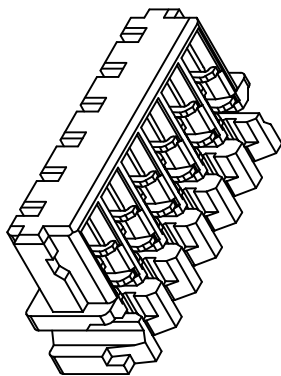
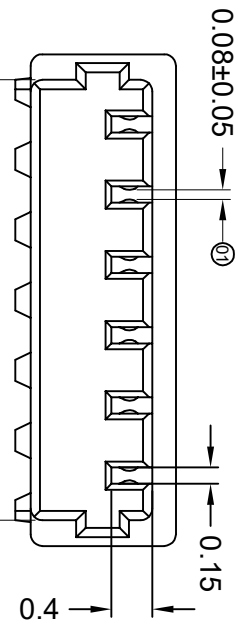



RoHS



- Specifications :
- Voltage rating: 30V AC / DC
 - Current rating: 0.2A AC / DC
 - Withstanding voltage: 200V AC/minute
 - Temperature range: -25°C~+85°C
 - Insulation resistance: ≥100MΩ
 - Contact resistance: ≤30mΩ
 - After environmental testing: ≤40mΩ
 - Material(Terminal): Phosphor Bronze
 - Wire Range:AWG#36/AWG#34
 - Insulation O.D.: 0.32mm(Max)
 - Mates With HLB Water: J0600WR

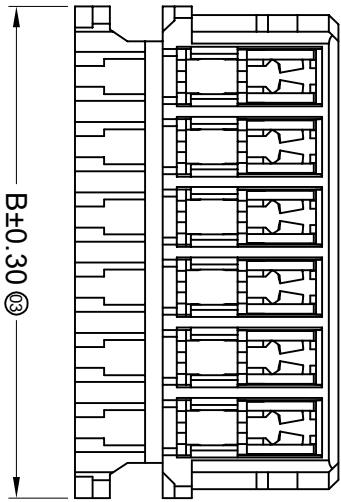

Poles	Dimensions(mm)			Dimensions(mm)			
	A	B	C	A	B	C	
02	0.60	1.80	1.35	12	6.60	7.80	7.35
03	1.20	2.40	1.95	13	7.20	8.40	7.95
04	1.80	3.00	2.55	14	7.80	9.00	8.55
05	2.40	3.60	3.15	15	8.40	9.60	9.15
06	3.00	4.20	3.75	16	9.00	10.20	9.75
07	3.60	4.80	4.35	17	9.60	10.80	10.35
08	4.20	5.40	4.95	18	10.20	11.40	10.95
09	4.80	6.00	5.55	19	10.80	12.00	11.55
10	5.40	6.60	6.15	20	11.40	12.60	12.15
11	6.00	7.20	6.75	22	12.60	13.20	12.75

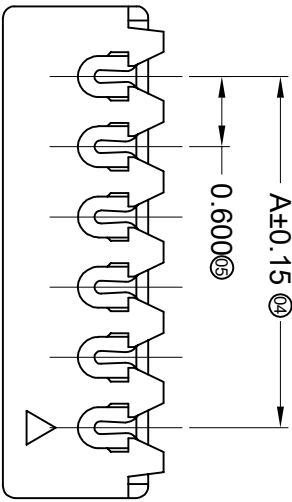

A

DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL
1			2			

GENERAL TOLERANCE
 X ±0.30
 XX ±0.20
 XXX ±0.10

PROJECT
 东莞市翰皓精密电子有限公司
 DONGGUAN HANHAO PRECISION ELECTRONIC CO.,LTD

PART NO. J0600HG-XX
 TITLE 0.60mm IDC Style Connectors

APPROVAL	CHECK	DRAWN	UNIT	SCALE	NUMBER	REV
Jova	W.X.T	Allen	MM	1:1	A-198	A

A

B

2

3

4

5

6

7

8

A

